


technical specification

input voltage 220Vac - 240Vac 1 phase 50Hz
(for all models)



model	STM 9610 / STM 10810	SE 715 / SE 915
output	6Vdc ~ 96Vdc / 12Vdc ~ 108Vdc	12Vdc ~ 84Vdc / 12Vdc ~ 108Vdc
max charging current	max 10Amp (selectable)	max 15Amp (selectable)
safety protection	input fuse 8Amp, output MCB 15Amp	input fuse 15Amp, output MCB 20Amp
dimension (h x w x d)	(300 x 340 x 330) mm	(485 x 580 x 320) mm
weight	24.0kg / 26.kg	41.0kg / 48.0kg

model: STM 9610 / STM 10810

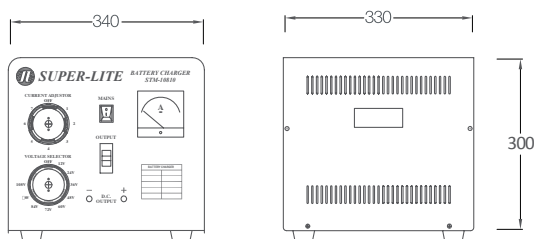

model: SE 715 / SE 915

