



STM 15015


technical specification

model: STM 15015

input voltage	220Vac ~ 240Vac 1 phase 50Hz
output voltage	150Vdc
charging current	max 0 ~ 15Amp (adjustable)
safety protection	input MCB 20Amp output MCB 20Amp
time setting	0 ~ 99hrs
current & voltage display	analog DCA & DCV panel meters
enclosure finishing	epoxy powder coated
dimension (h x w x d)	(400 x 590 x 410) mm
weight	75.5kg

dimensions

model: STM 15015

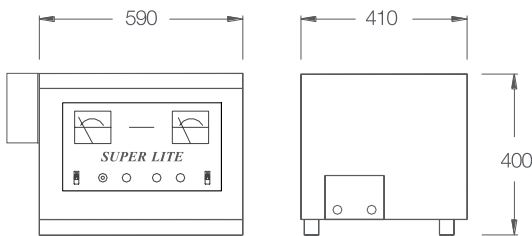

STM 15030

technical specification

model: STM 15030

input voltage	220Vac ~ 240Vac 1 phase 50Hz
output voltage	150Vdc
charging current	max 0 ~ 30Amp (adjustable)
safety protection	input MCB 40Amp output MCB 40Amp
time setting	0 ~ 99hrs
current & voltage display	analog DCA & DCV panel meters
enclosure finishing	epoxy powder coated
dimension (h x w x d)	(500 x 760 x 510) mm
weight	132.5kg

model: STM 15030

