



LUMINAIRE SPECIFICATIONS

- Power 800W
1000W
1200W
- Fitting Material Die-Cast Aluminium
- Fitting Color Gray
- Optical Cover Polycarbonate
- Ingress Protection IP66
- Impact Protection IK08
- Voltage 220 ~ 240 Vac 50 / 60 Hz
- Operating Temperature -40 ~ +50°C
- Surge Protections 10kA, 20kV

OPTIONAL FEATURES

- Beam Angle 20°
40°
60°

LED MODULE SPECIFICATIONS

- Color Temperature 5700K
- LED Chips 5050
- Color Rendering Index (CRI) Ra >80
- L70 100,000 Hrs @ 25°C

COMPLIANCE STANDARD

- LED LM80, UL, RoHS
- Driver CE, EN62384, EN61347, EN55015, EN61000

APPLICATION

- Sports & Recreational Fields, Large-Scale Outdoor Events, Industrial & Construction Sites, Parking Lots & Garages, Crane Lighting, Security & Outdoor Surveillance.

MEASUREMENT & ORDER CODE


WATTAGE	TYPICAL WATTAGE	LUMEN	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
800W	800W	118300	590 x 542.6 x 528	28.5 kg
1000W	1000W	148800	590 x 542.6 x 528	28.5 kg
1200W	1200W	177500	590 x 542.6 x 528	28.5 kg

* Please indicate LED color temperature and optic when ordering.

* All result tested base on 5700K CCT LEDs.




DIMENSION

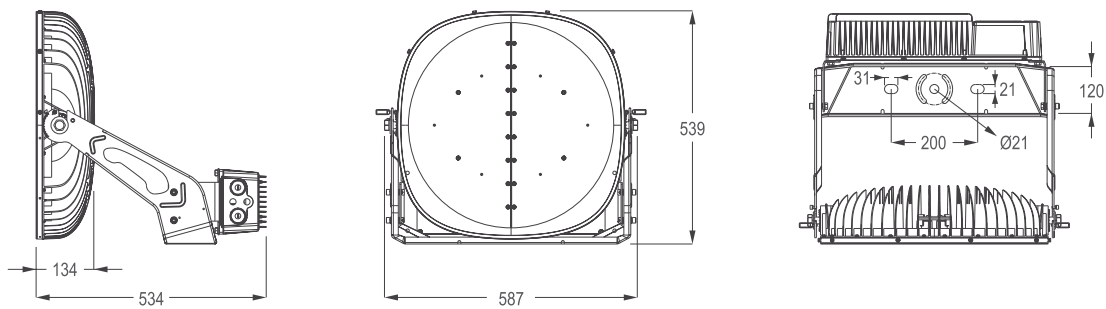


PHOTOMETRIC

20°




cd/klm
C0/C180: — C90/C270: —

40°



cd/klm
C0/C180: — C90/C270: —

60°



cd/klm
C0/C180: — C90/C270: —

Note: All specifications are subject to change without prior notice for product improvement. Images are for illustrative purposes only.